



# Verso

## Alternating Pressure Redistribution System

- Suitable for patients in medium to high risk of pressure injuries
- Dual therapy modes - to fulfill individual care needs
- Multi-functional cover with high vapour permeability to aid in microclimate management
- Quality materials for better clinical outcomes & long-term use
- Rigorous flame retardant standards and low pressure alarm for patient safety





# Verso

## Alternating Pressure Redistribution System

*"Relieving, Reviving"*



**Durable Nylon PU Air Cell Material**  
High resistant to mechanical tear, durable, lightweight and compatible with REACH & RoHs standards

**Great Chlorine Resistance (Stretch Cover)**  
10,000ppm Chlorine resistance allows the top covers to be withstood rigorous disinfection practices



**Quick connector with transport cap**  
Providing a stable surface for patient transportation up to 8 hours



**CPR Strap**  
Quickly deflate the mattress during emergency



**Visual Low Pressure Alarm**  
Major problems, such as disconnections or leaks can be soon noticed via the LED alert



Nylon PU



### Cover Features



Water Resistant



Flame Retardant



Biocompatible



Vapour Permeable



Low Friction and Shear

Stretch PU




### Stretch Cover (Optional)

4-way, BS 7175 Crib 5 & 7. Stretch PU Cover comes with high elasticity and low friction to reduce friction and shear force



**Fresh Air With Antimicrobial Filter**  
Antimicrobial material to filter the air coming into the system from the usage environment

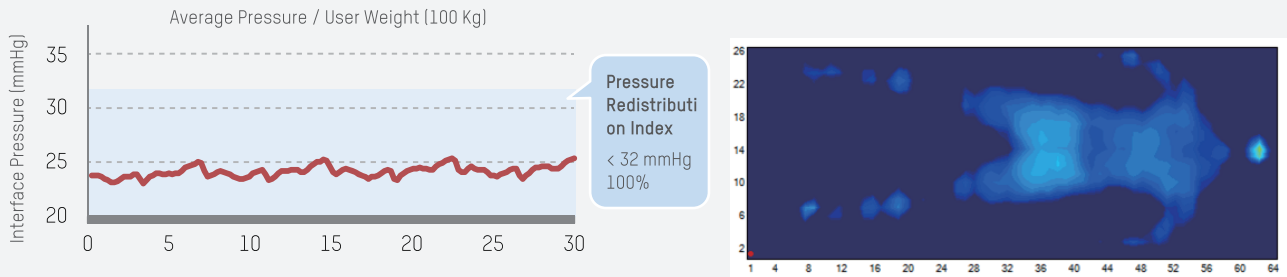

The Pressure Redistribution Index (PRI) and the pressure mapping conducted by placing a test subject weighted 100kg on Verso overlay mattress. The PRI performance is superior as it is far below 32 mmHg at 100% of test period.

## A Compact Pressure Redistribution Mattress System with Dual Therapy Modes

### • Constant Comfort

Considerably low pressure range from 30 to 60 mmHg in both therapy modes, providing a constantly comfortable perception while still retaining sufficient support to the patient

### • 2 Modes to Fulfill Individual Needs

- Alternating
- Static



### Alternating

- Continuously and sequentially inflates and deflates air cells to achieve periodic pressure relief

### Static

- Equally inflate air cells for a static mattress surface for caregivers to conduct nursing activities

## Specifications

Model	Verso	
Pump	Dimensions	25 x 13.5 x 9.5 cm
	Weight	1.76kg / 3.9 lb
	Case Material	Flame retardant ABS
	Supply Voltage	AC 220 - 240 V/ 50Hz; 110-120V / 60 Hz
	Operating Cycle	9.6 mins (50Hz) / 8 mins (60Hz)
Mattress		5" Overlay
	Dimension	200 x 85 / 90 x 12.7 cm
	Alternating	1 - in - 2
	Cell Height	17 x 5" cells
	Weight	5.2 kg / 11 lb
	Cover Material	Nylon / PU
	Cover Material (Optional)	4-way Stretch PU
	Cell Material	Nylon PU
	Maximum Patient Weight	160 kg / 350 lb
	Flame Retardant Standards	EN597-1; EN597-2

*Specifications are subject to change for improvement without notice*